


N05Z1ZH4-U / N05Z1Z1H4-R

HALOGEN FREE FLAT TWIN WITH INSULATED EARTH

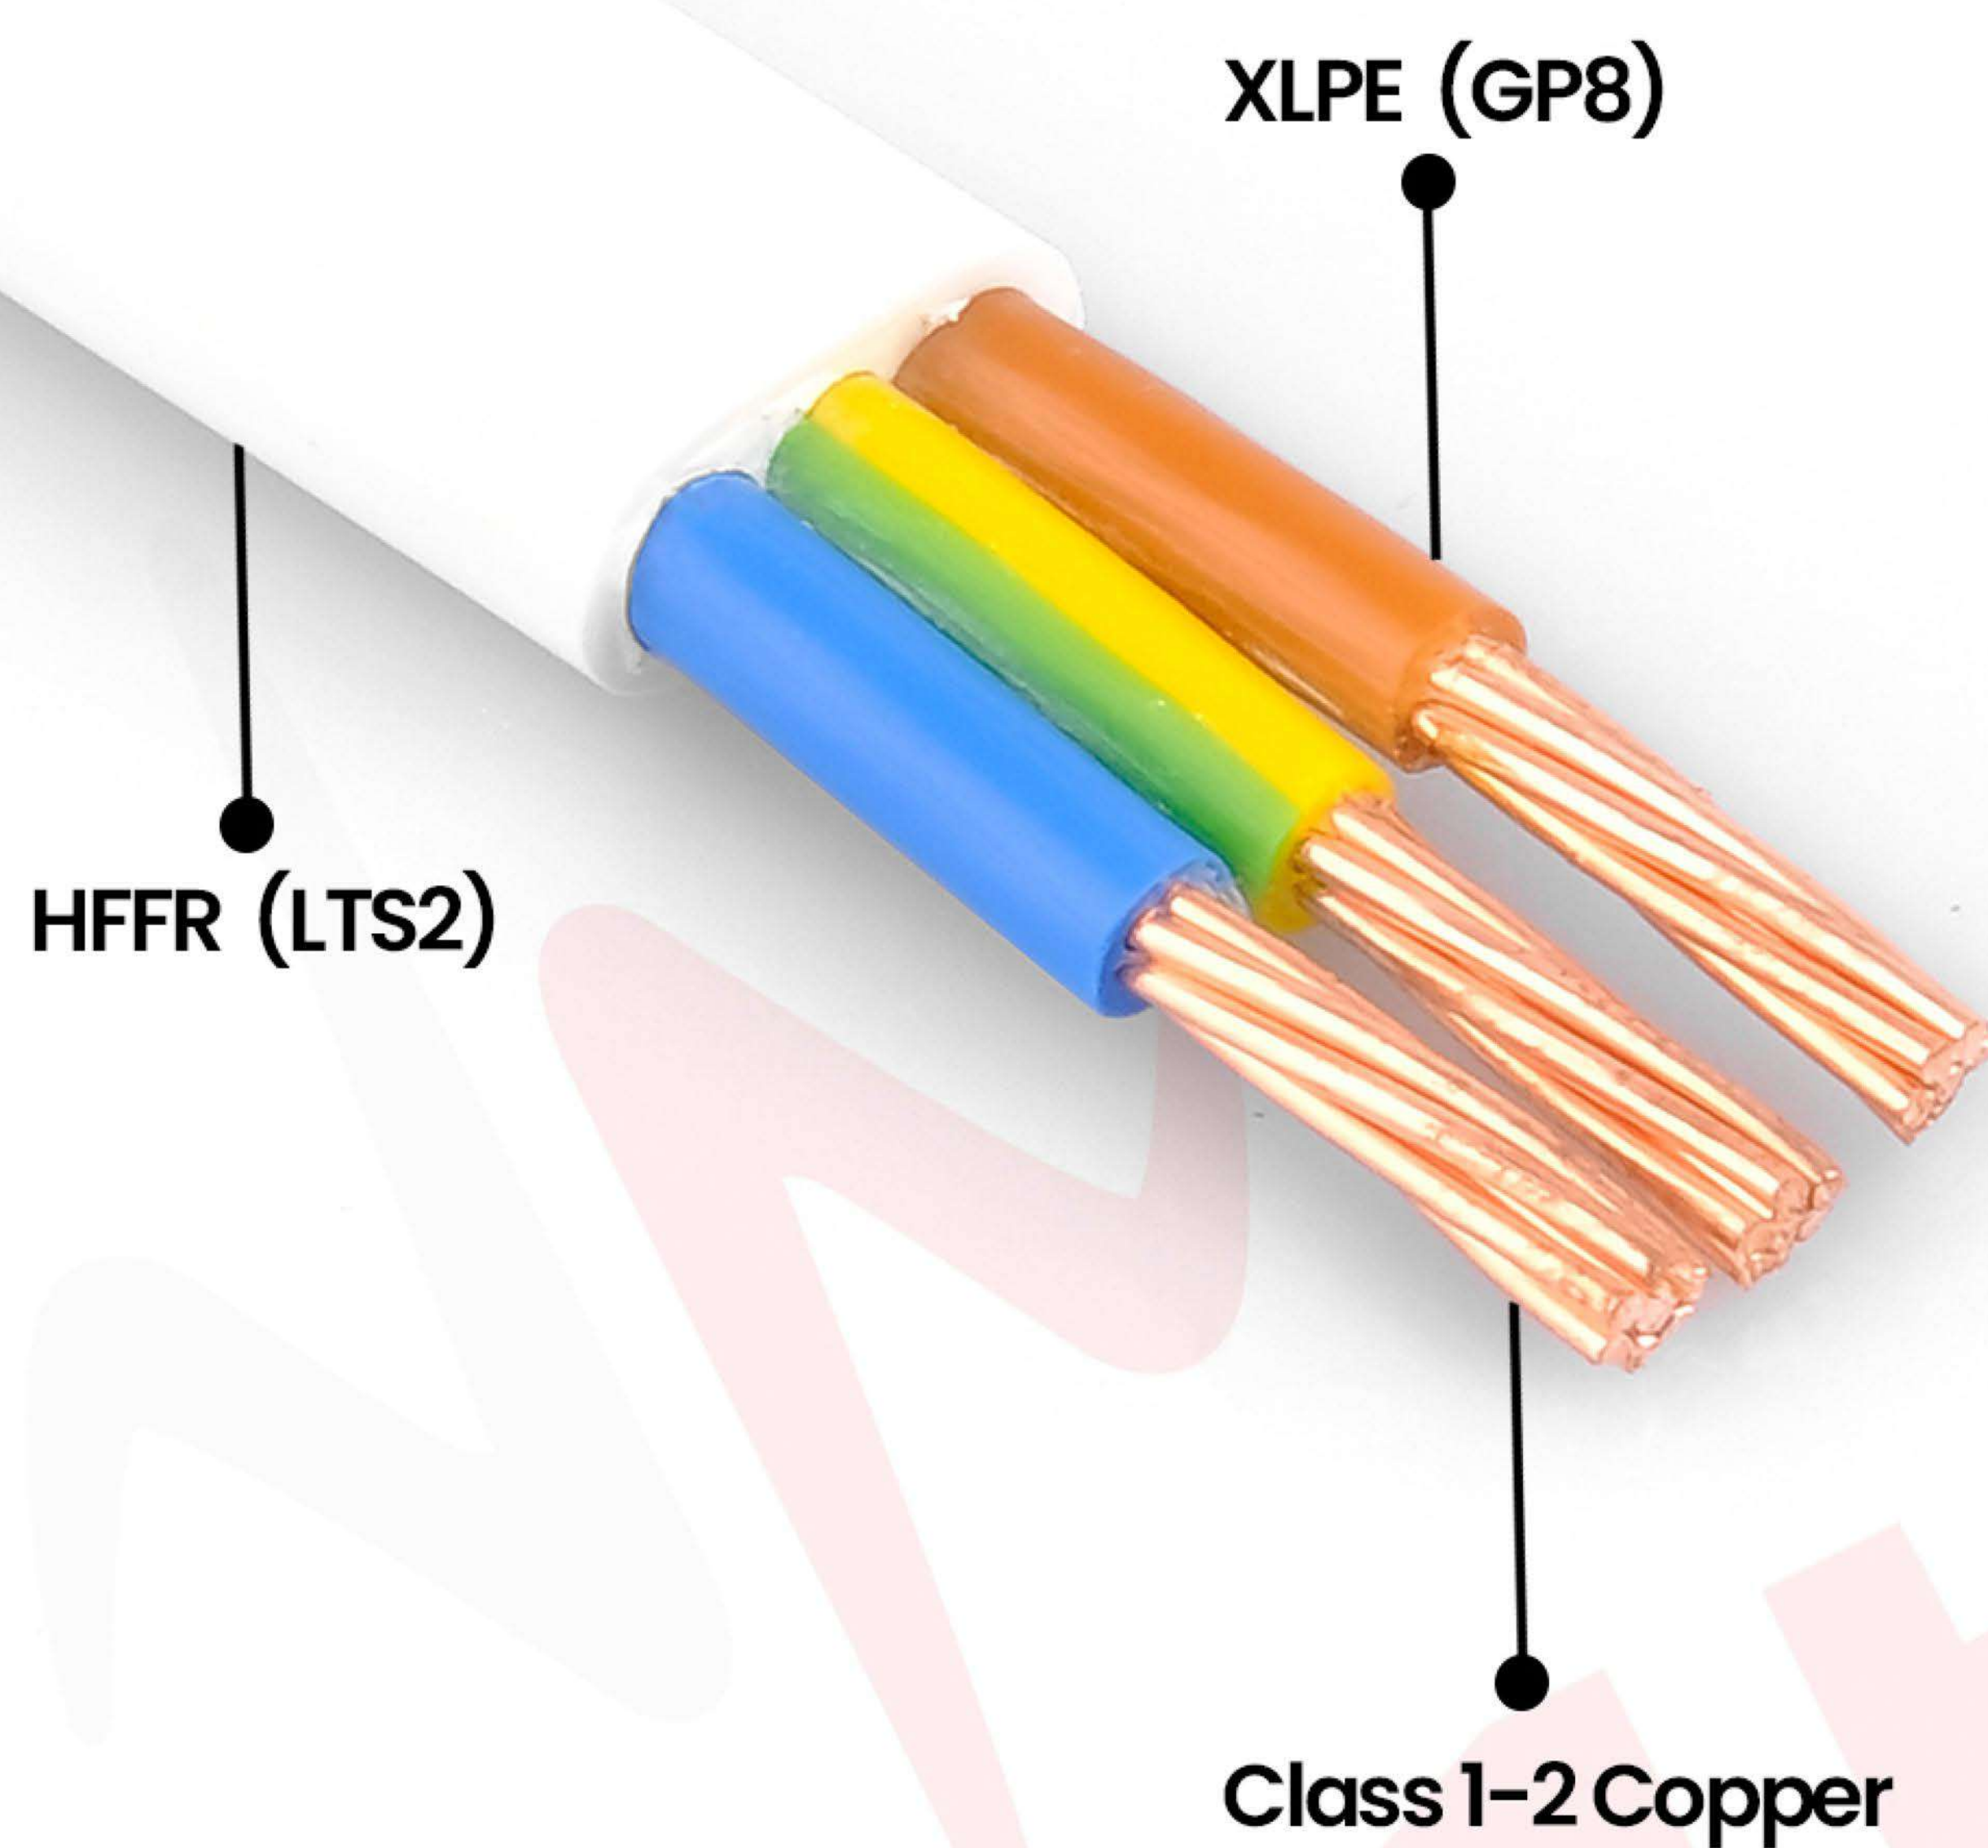

TYPE: N05Z1ZH4-U / N05Z1ZH4-R

STANDARDS: I.S.2014:2013

TECHNICAL DATA:

Max. Operating Temperature: +90°C

Rated Voltage: 300 / 500 V

Declared Performance:

Dca-s2,d2,d1 (EN 50575:2014/A1:2016)

Low Smoke Zero Halogen according to IEC/EN 60754-1/2, IEC/EN 61034-2

Flame Retardant according to IEC/EN 60332-1-2

CONSTRUCTION:

CONDUCTOR: EN 60228 Class 1-2 Copper

INSULATION: XLPE (GP8)

SHEATH: HFFR (LTS2)

APPROVALS:



80

